



CourtWrap & CW Protect

An ultra-removable polypropylene film with a proprietary repositionable, washable, reusable adhesive.

Use with matched-component CW Protect laminate for a complete floor graphic solution especially designed for smooth athletic playing surfaces.

APPLICATIONS

- Indoor Athletic Court Floors
- Reusable Travel Team Logos
- Temporary Dance Floor/Event Graphics

CourtWrap

MATERIAL

Face Film	Printable White Multilayered Cast Polypropylene
Back Side	Silver Metallic
Adhesive	Proprietary Long-Term Repositionable Removable Reusable - 25g/m ²
Liner	Clear PET - 5 mil (125μ +/- 10 μ)
Film Thickness	3 mil (75μ +/- 10μ)
FR Certification	Not Tested

DURABILITY



Interior	Up to 4 Years
Exterior	Up to 3 Years - Vertical Exposure under Normal Conditions
Environment	Humidity and Solvent Resistance - Good
Shelf Life	1 Year
Storage Requirements	Stored at 59°F to 77°F (+15°C to +25°C) with a Relative Humidity between 45% to 70%.
Repositionable	Yes

APPLICATION/REMOVAL

Application Temp	+50°F to +86°F (+10°C to +30°C)
Service Temp	+0°F to +122°F (-17°C to +50°C)
Removability	Cleanly Removable with No Adhesive Residue - Adhesion May Increase Depending on Surface and Length of Time
Removal Temp	+50°F (+10°C) or Greater
Exclusions	NOT to be Applied to PVC, Copper, or Unpainted Metal, as the Application May Become Permanent.

Surface must be clean and dry. Prevent contact with solvent or ammonia-based cleaners. For best results, clean with a mild detergent and water and dry thoroughly. For full installation instructions and tips, please refer to "CourtWrap Application Guidelines."

**For critical substrates and all surfaces, please test PRIOR to application.*

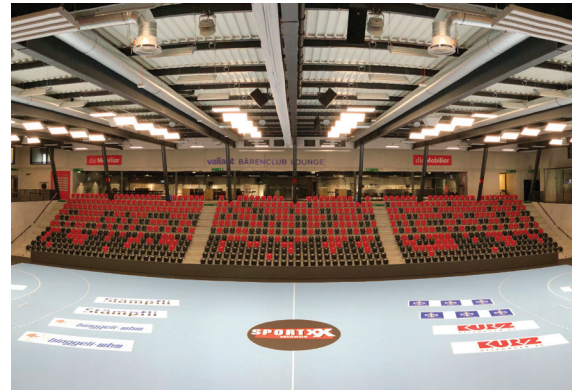

Printing Methods

- Digital - Solvent, Eco-Solvent, UV & Latex
- Screen Print
- Offset



Material Sizes

- 54" x 100'



Advantages

- Easy Application and Removal for Temporary Athletic Floor Graphics
- Washable, Reusable Adhesive Means Graphics May Be Used Again and Again without Loss of Adhesion
- Laminate with Matched-Component CW Protect for Non-Skid Athletic Court Graphics

→ For more information

For additional product information, performance, and warranty guidelines please contact Continental Grafix USA, Inc.

1-704-872-2216 • www.cgxusa.com

CW Protect

MATERIAL

Face Film	Clear Textured PVC
Back Side	Clear
Adhesive	Permanent Clear Solvent - 20g/m ² +/- 3g/m ²
Liner	Siliconized Paper
Film Thickness	7 mil (180µ +/- 5 µ)
FR Certification	Not Tested
Slip Certification	ANSI A137.1/A326.3, R10

DURABILITY


Interior	Up to 1 Year
Exterior	Not Recommended
Environment	Humidity and Solvent Resistance - Good
Shelf Life	1 Year
Storage Requirements	Store at +59°F to +77°F (+15°C to +25°C) with a Relative Humidity between 40% and 65%
Repositionable	No

APPLICATION/REMOVAL

Application Temp	Minimum +50°F (+10°C)
Service Temp	+0°F to +122°F (-17°C to +50°C)
Removal Temp	Minimum +50°F (+10°C)
Laminating Method	Cold, Heat Assist

Surface must be clean and dry. Prevent contact with solvent or ammonia-based cleaners. For best results, clean with a mild detergent and water and dry thoroughly. For full installation instructions and tips, please refer to "CourtWrap Application Guidelines."

**For critical substrates and all surfaces, please test PRIOR to application.*

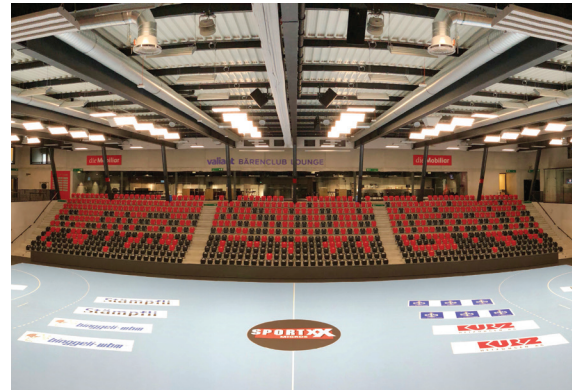

Printing Methods

- Not Applicable



Material Sizes

- 54" x 100'



Advantages

- For Use with CourtWrap or Any Other Flooring Material Where Non-Slip Certification Is Crucial

→ For more information

For additional product information, performance, and warranty guidelines please contact Continental Grfx USA, Inc.

704-872-2216 • www.cgxusa.com