
CONTINENTAL

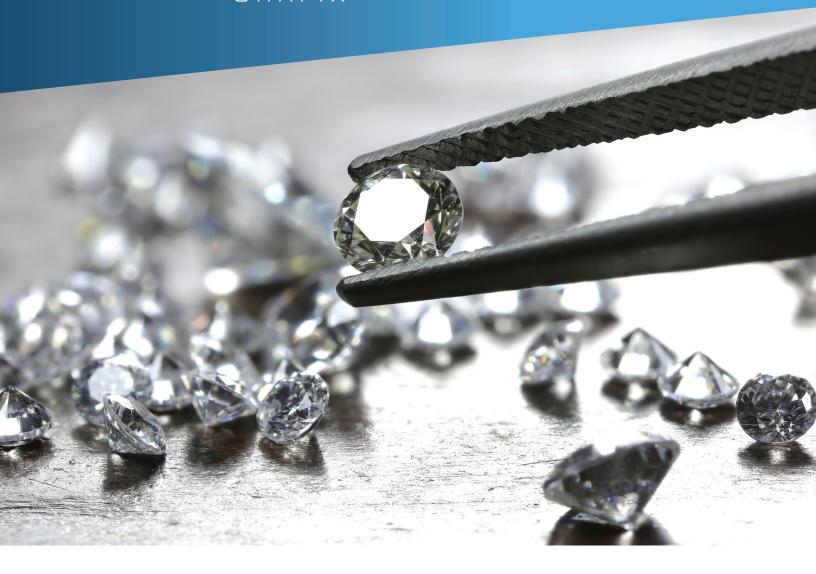

iTac Clear / iTac Clear Plus 🙃

An optically clear PET film backed with a proprietary adhesive for interior and exterior applications on a variety of smooth surfaces.

iTac Clear is the perfect choice to communicate your branding and messaging with crisp color.

The proprietary adhesive technology supports a wet or dry install for flawless graphics and long-term removal without residue.

APPLICATIONS

- Retail and Decorative Window Graphics
- Corporate Environmental Graphics
- High-Quality
 Labeling for
 Electronics, Glass,
 and any Smooth
 Surface

iTac Clear / iTac Clear Plus 🛟



MATERIAL	
Face Film	Optically Clear Gloss PET
Back Side	Clear Adhesive
Adhesive	Proprietary Removable Repositionable Washable
Liner	Siliconized Frosted PET
Film Thickness	4.3 mil (110μ +/-10μ)
FR Certification	Not Tested
Recyclable	Yes, Where Facilities Allow

DURABILITY	
Interior	Up to 3 Years - Vertical Exposure under Normal Conditions, Exclusive of Ink
Exterior	Up To 2 Years - Vertical Exposure under Normal Conditions, Exclusive of Ink
Environment	Humidity & Solvent Resistance – Very Good
Shelf Life	1 Year
Storage Requirements	Store at +50°F to +75°F (+10°C to +24°C) and Relative Humidity Between 45% and 60%
Repositionable	Yes

APPLICATION/REMOVAL		
Application Temp	Minimum +25°F (-4°C)	
Service Temp	+0°F to +250°F (-17°C to +121°C)	
Removability	Cleanly Removable up to 3 Years	
Removal Temp	+50°F (+10°C) or Greater	

Surface must be clean and dry. Prevent contact with solvent or ammoniabased cleaners. For best results, clean glass or install surface with a mild detergent and water and dry thoroughly prior to application. May be wet installed. For full installation and removal recommendations, please refer to "iTac Clear Handling Recommendations".





Printing Methods

- · iTac Clear: Digital -UV & Latex (Gen 3+)
- · iTac Clear Plus: Digital -Solvent, Eco-Solvent, **UV & Latex**



Material Sizes

• 54" x 100'



Advantages

- Easy Application on a Variety of Smooth Surfaces
- PVC-Free Construction and Recyclable Where Allowed
- · Proprietary Adhesive offers Clean Removal Even After Long-Term Installation
- · Extremely Dimensionally Stable



For more information

For additional product information, performance, and warranty guidelines please contact Continental Grafix USA, Inc.

704-872-2216 · www.cgxusa.com



^{*}For critical substrates and all surfaces, please test PRIOR to application.