


# panoRama Cast™

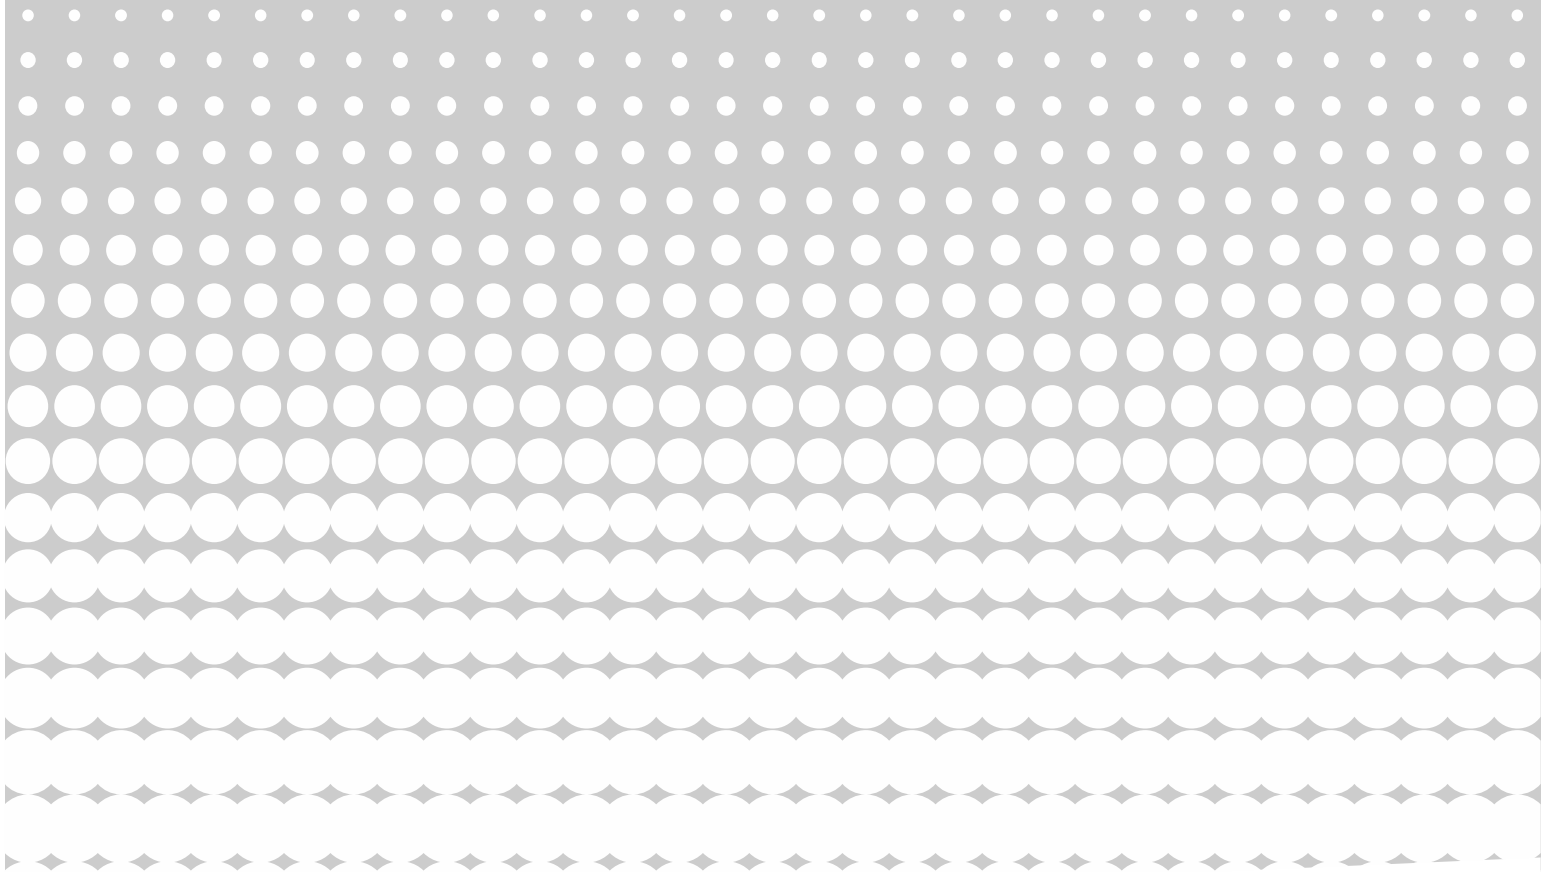

Ultra Clear Gloss Cast OverLaminate  
& Custom Printable Film For Windows

## APPLICATIONS

- OverLaminate & Edge Protection For All Window Perf Applications
- Ultra Clear Printable Film For Windows

[WWW.CGXUSA.COM](http://WWW.CGXUSA.COM)

CONTINENTAL  
GRAFIX

# panoRama Cast™

## MATERIAL

Face Film	Optically Clear Gloss Cast Vinyl
Backing	Optically Clear Adhesive
Adhesive	Permanent, High Tack, Solvent Acrylic
Liner	Frosted Polyester - 1.2mil (30 microns)
Thickness	2mil (50 microns)
FR Certification	Not Tested
UV Resistant	Yes - High

## DURABILITY

Interior	Up To 5 Years
Exterior	Up To 3 Year - Vert. Exposure Under Norm. Cond.
Environment	Humidity & Solvent Resistance - Good
Shelf Life	12 Months
Storage Requirements	Store at +59°F to +68°F (+15°C to +20°C) with a Relative Humidity of 45% to 65%
Repositionable	No

## APPLICATION/REMOVAL

Application Temp	+50°F to +86°F (+10°C to +30°C)
Service Temp	+0°F to +122°F (-17°C to +50°C)
Removability	Cleanly Removable With No Adhesive Residue, Up To 6 Months - Adhesion May Increase Over Time
Removal Temp	+50°F (+10°C) Or Greater
Exclusions	NOT To Be Applied On Fresh Paint, Polycarbonate, And Some PVC (No Exhaustive List Available)

Surface must be clean and dry. Prevent contact with solvent or ammonia based cleaners. For best results, clean surface with a mild detergent and water and dry thoroughly. Always clean and dry surface prior to application.



### PRINTING METHODS

Digital - Solvent, Eco-Solvent, Latex & UV Inks; Screen Printing; Offset



### MATERIAL SIZES

60" x 150', 54" x 150'



### ADVANTAGES

- Provides Excellent UV Protection And Clarity
- Premium Cast Vinyl Designed For Long Term Graphics
- Frosted Liner For Improved Printing, Handling and Installation

For additional product information, performance, and warranty guidelines please contact **Continental Grafix USA, Inc.** at 1.704.872.2216 or visit [www.cgxusa.com](http://www.cgxusa.com).

**Note:** For critical substrates, always test prior to application.